

Your local **gas generation** partner



Solaris & Infinity XE

Nitrogen gas generators for
analytical laboratory applications

Discover more at www.peakscientific.com

Why choose **Solaris** or **Infinity** for your nitrogen needs?

- **High purity nitrogen gas on demand**

Up to 99.5% purity with flow rates ranging up to 520 L/min for even the most demanding laboratory applications.

- **Simple operation and long working life**

Easy to configure and few moving parts* means systems are low maintenance and low noise.

- **Safe and convenient gas supply**

Eliminate recurring costs of ordering and hazards of handling high pressure gas cylinders or dewars.

- **Advanced hollow fiber membrane module technology**

High purity performance and long lifetime durability from the highest specification membranes.

- **Small laboratory footprint**

Minimal footprint to save valuable lab space, with bench-top (Solaris) and free standing (Infinity XE) solutions.

- **High quality engineering**

Designed, engineered and tested to highest standards at our UK ISO 9001 accredited manufacturing center.

*exception being optional compressor


Why Peak Scientific

Providing your lab with a reliable source of gas at the push of a button, a Peak gas generator takes away the hassle and inconvenience of handling cylinders in your lab, allowing you to work more efficiently. With 20 years' experience in gas generation and our unique brand promise to deliver on-site service and support, having a Peak in your lab means you can focus on what really matters.

As we have grown to become a leader in gas generation, so has our specific expertise and experience in the analytical instrument market. With a global infrastructure including offices in over 15 countries, we are uniquely placed to deliver local and personal support wherever our customers may be. When you buy Peak, you are buying not just technology, but the reassurance that comes from having a truly local partner in your lab.

Exceptional Expertise

- Over 32,000 generators sold globally over the past 20 years.
- Approved and validated gas solutions with most major LC-MS manufacturers including Waters, Sciex, Agilent, Thermo-Fisher, Shimadzu and Bruker.
- Many experienced staff with over a decade of service and with some over 20 years – we know our business!

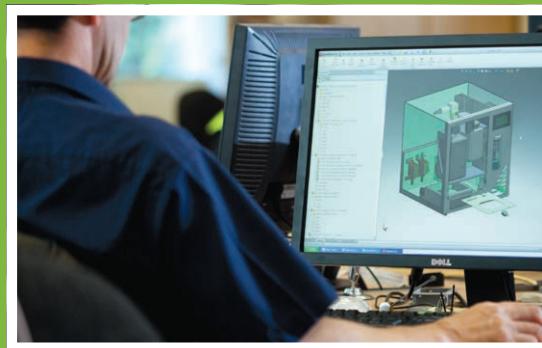

Exceptional Service

- Over 100 employees in 25 countries delivering direct on-site support in your local language.
- Rapid-response 72 hour guaranteed on-site engineer coverage globally (48hrs or less in many countries).
- Same-day global shipment of replacement parts (if ordered before 2pm, UK).



Exceptional Quality

- Modern manufacturing with industry-leading quality control.
- Generators designed, engineered and hand-built in UK to ISO 9001 standards.
- Rigorous certification and compliance testing in accordance with CSA, CE, FCC, and EMC.



ELSD and Compact MS

Solaris 10 is a compact, convenient nitrogen source for applications with lower flow demands, such as ELSD and Compact Mass Spectrometers.

Solaris 10

Peak Scientific's Solaris Nitrogen generator has been developed to provide an optimal gas generation solution for ELSD or Compact Mass Spectrometers, with the goal of reducing instrument downtime and improving workflow efficiencies.

Engineered with a space-saving design, Solaris 10 can be placed on a benchtop and paired with an additional optional Solaris air compressor unit to provide air supply for labs without an in-house air supply or for those who wish to contain their gas supply in a single system.



Features

- High purity nitrogen for ELSD or Compact Mass Spectrometers
- Flows up to 10 L/min at 100 psi and up to 99.5% purity
- Compact benchtop form factor
- Color indicative LED lighting for easy status awareness
- Optional Solaris Air Compressor stackable module
- Manufactured and tested to highest specifications in UK; CE and FCC certified

Bench-top solution for your LC-MS

The Solaris XE can effortlessly provide laboratory grade nitrogen for labs with 1-2 Mass Spectrometers.

Solaris XE

Peak Scientific's Solaris XE generator has been engineered using membrane technology to meet the gas delivery requirements for labs using LC-MS, Compact MS or multiple ELSDs. Solaris XE can operate with varying flow rates (up to 35L/min of high purity nitrogen), purity (up to 99.5%) and outlet pressure can be adjusted down from 116psi, offering a flexible solution for a variety of applications.

The Solaris XE range has been engineered to provide nitrogen to laboratories that utilize an external source of compressed air, which meets a minimum quality grade of ISO 8573-1:2010 Class 1.4.1, and its compact, space-saving chassis allows it to be placed on a benchtop, on a wall or beneath an instrument* taking up minimal space in the lab.



Features

Nitrogen up to 35L/min, up to 116 psi and up to 99.5% purity

Variable outlet flow, pressure and purity

Compact, stackable* system maximizing the use of valuable laboratory floor or bench space

Color indicative LED lighting for easy status awareness

Manufactured and tested to highest spec in UK, CE/FCC certified

Safer and more convenient than pressurized cylinders, dewars or bulk storage

Multiple instrument N2 solution for your whole laboratory

For larger labs with three or more mass spectrometers in the lab, or more demanding applications requiring higher flow and/or high purity (up to 99.5%) our Infinity XE 50 series, with flow rates up to 520 L/min, are the ideal solution.

Infinity XE

Producing up to 520 L/min of high purity nitrogen gas, Infinity XE 50 series can comfortably supply multiple laboratory instruments simultaneously. With 8 models in the range offering various flows and purity capabilities up to 99.5% and a new PurityGuard™ for purity-critical applications (model dependent), Infinity XE 50 gives you a centralized solution to meet the demands of your whole laboratory which may include multiple LC-MS, ELSD and sample evaporators. With no moving parts and quiet in operation, our Infinity XE 50 series is easy to service and requires minimal maintenance.



Features

- Flow rates ranging from 10-520 L/min*
- Variable N2 purities, ranging from 95-99.5%*
- Maximum output pressure of 135 psi
- Built upon tried & tested membrane technology
- Compact, space saving design
- Optional PurityGuard™, with auto-shutdown feature
- Energy efficient eco-mode ensures low running cost

Installation and compressed air supply

With global coverage and decades of expertise in gas generation in the lab, we can provide direct support, advice and guidance on specification and installation of your Solaris XE or Infinity XE N2 system. Please talk to your local Peak Scientific representative for assistance in selection and installation in your facility – that's where we excel.

As Solaris XE and Infinity XE do not contain internal air compressors, a supply of clean dry compressed air (conforming to ISO 8573-1:2010 Class 1.4.1) is required to operate the system. This may be available in your laboratory already, but if not, we can assist in supply or recommendations to install an external compressed air system suitable for your generator. Normally this would be located elsewhere outside the laboratory to minimize noise and vibration.

When purity is mission-critical

For specialized laboratory applications where maintaining a very precise minimum purity of nitrogen is essential, our Infinity XE 50X1 models are the answer. The 5011, 5021, 5031 and 5041 models feature our new PurityGuard™ auto-shut down, in the event of any drop in nitrogen purity below the specified threshold. This factory set feature continuously monitors the purity of nitrogen gas being generated and if this deviates for a period, the generator will provide a 'high oxygen warning' and initiate a timed system auto-shutdown.

This additional feature is the only difference between the four standard Infinity XE 50 models (5010-5040) and the four 50X1 models. For LC-MS nitrogen supply only, we recommend the standard models as the higher purity is not an issue for normal mass-spec analysis.

Please note the PurityGuard™ feature is not an optional extra to be added to an existing Infinity XE 50 after installation - it must be specified at order and is only available on the 5011-5041 models.

Solaris Series

Technical Specifications

	Solaris 10	Solaris XE
Max Flow Rate*	up to 10 L/min	up to 35 L/min
Purity N ₂ *	95-99.5%*	95-99.5%*
Max Outlet Pressure	up to 100 psi / 6.9 bar (user adjustable)	up to 116 psi / 8 bar (user adjustable)
Inlet Air Quality Requirement		ISO8573 - 1:2010 (1:4:1)
Inlet Air Pressure Requirement	80 psi/ 5.5 bar - 130 psi/ 8.9 bar	80 psi/5.5 bar - 145 psi/10 bar
Dimensions H x W x D	156 x 416 x 540 mm / 6.1 x 16.4 x 21.3"	156 x 343 x 650 mm / 6.1 x 13.5 x 25.6"
Ordering Information	65-0001	3300671

Solaris Compressor

Technical Specifications

	110v	230v
Ordering Information	65-0004	65-0003

Infinity XE Series

Technical Specifications

	Infinity XE 501X	Infinity XE 502X	Infinity XE 503X	Infinity XE 504X
Max Flow Rate*	10-130 L/min	20-260 L/min	30-390 L/min	40-520 L/min
Purity N ₂ *		95%-99.5%		
Max Outlet Pressure		135 psi		
Inlet Air Quality Requirement		ISO 8573-1:2010 (1:4:1)		
Inlet Air Pressure Requirement		60 psi/4.1 bar - 145 psi/ 10 bar		
Dimensions H x W x D		995 x 500 x 500 x mm / 39.2 x 19.7 x 19.7"		
Ordering Information				
With Purity Guard™	3300189	3300190	3300191	3300192
Without Purity Guard™	3300572	3300573	3300574	3300575

*Dependant on inlet pressure, inlet/outlet flow and inlet air quality

Contact us today to discover more!

North America

Tel: +1 866 647 1649

China

Tel: +86 21 5079 1190

Web: www.peakscientific.com

Europe

Tel: +44 (0)141 812 8100

India

Tel: +91 40 2780 0663

Email: discover@peakscientific.com